

1/22

FIG. 1


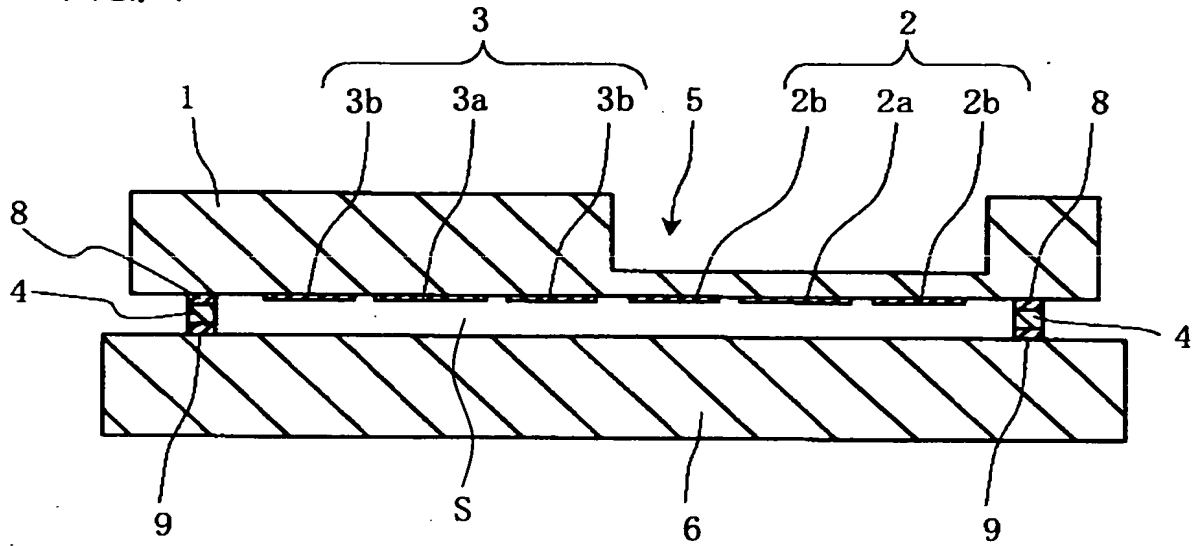


FIG. 2

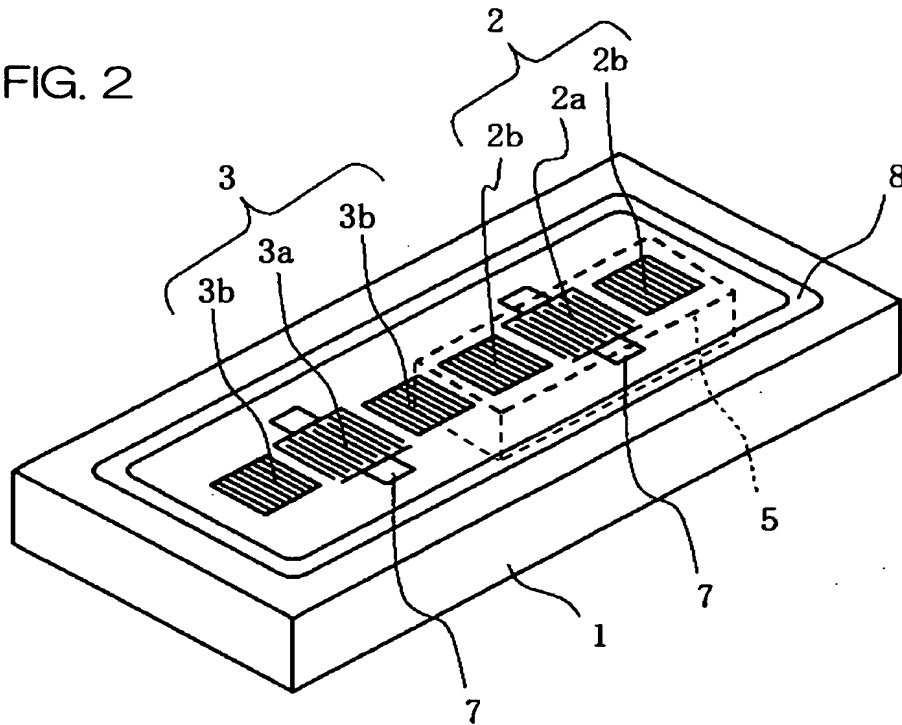

2/22

FIG. 3

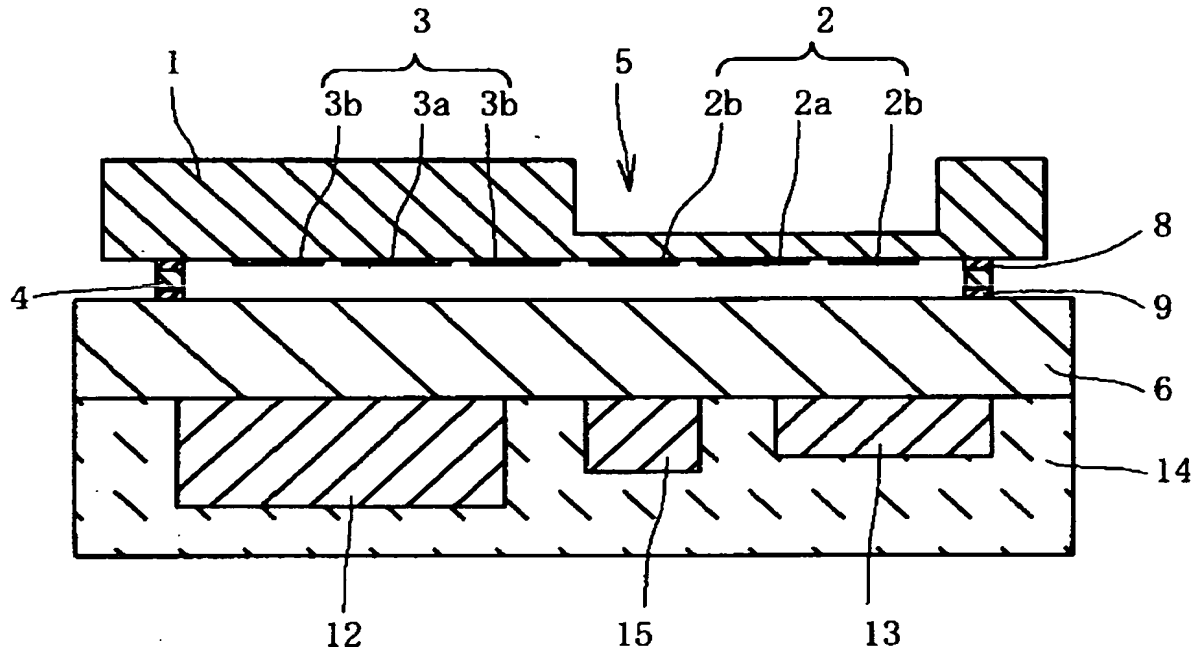


FIG. 4

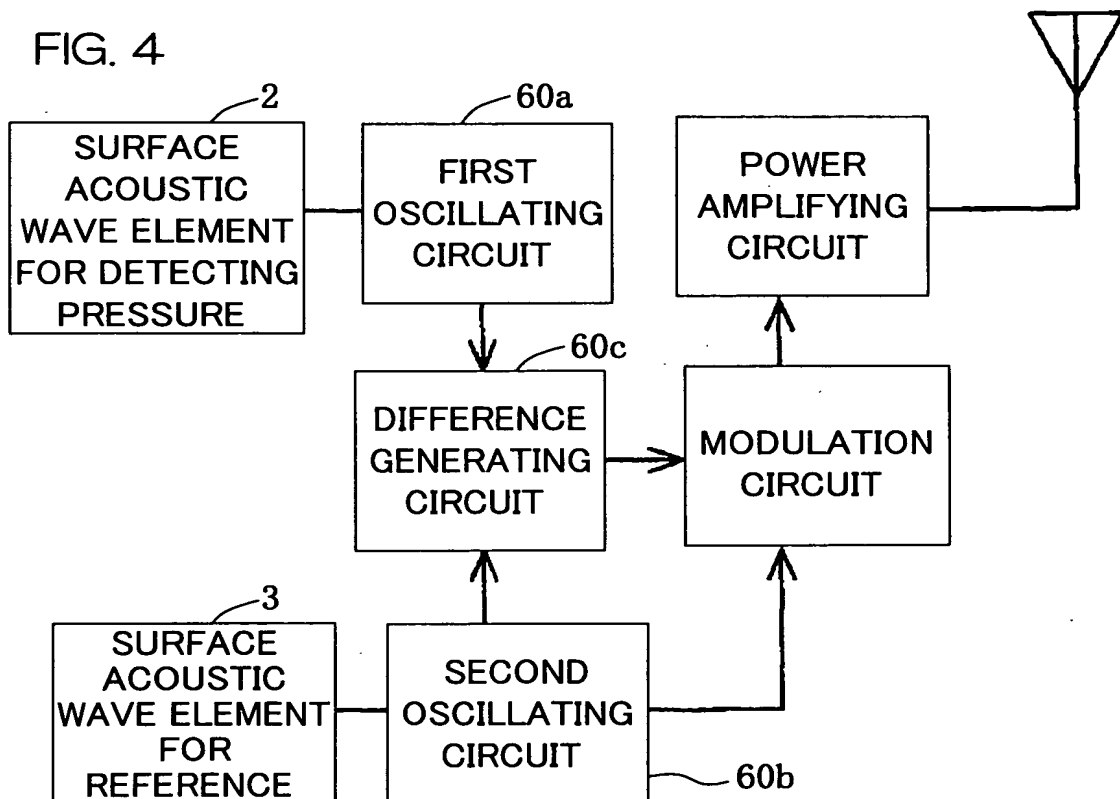


FIG. 5


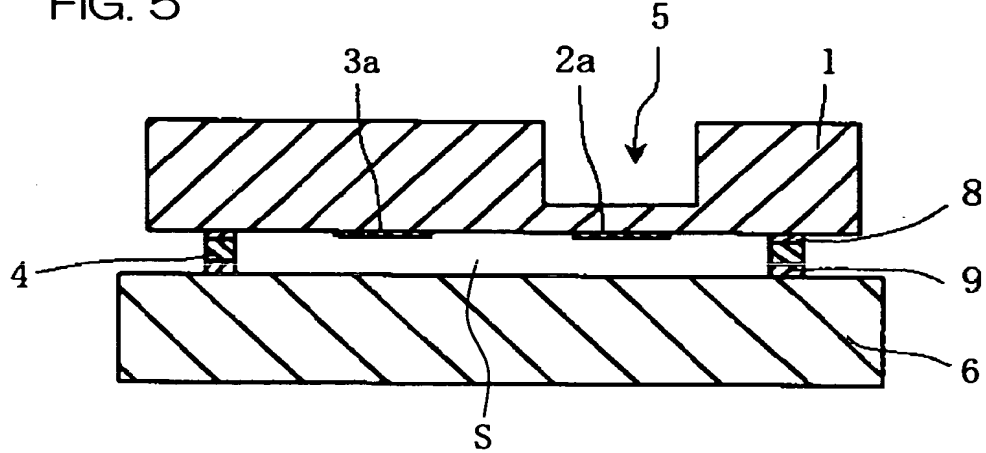


FIG. 6

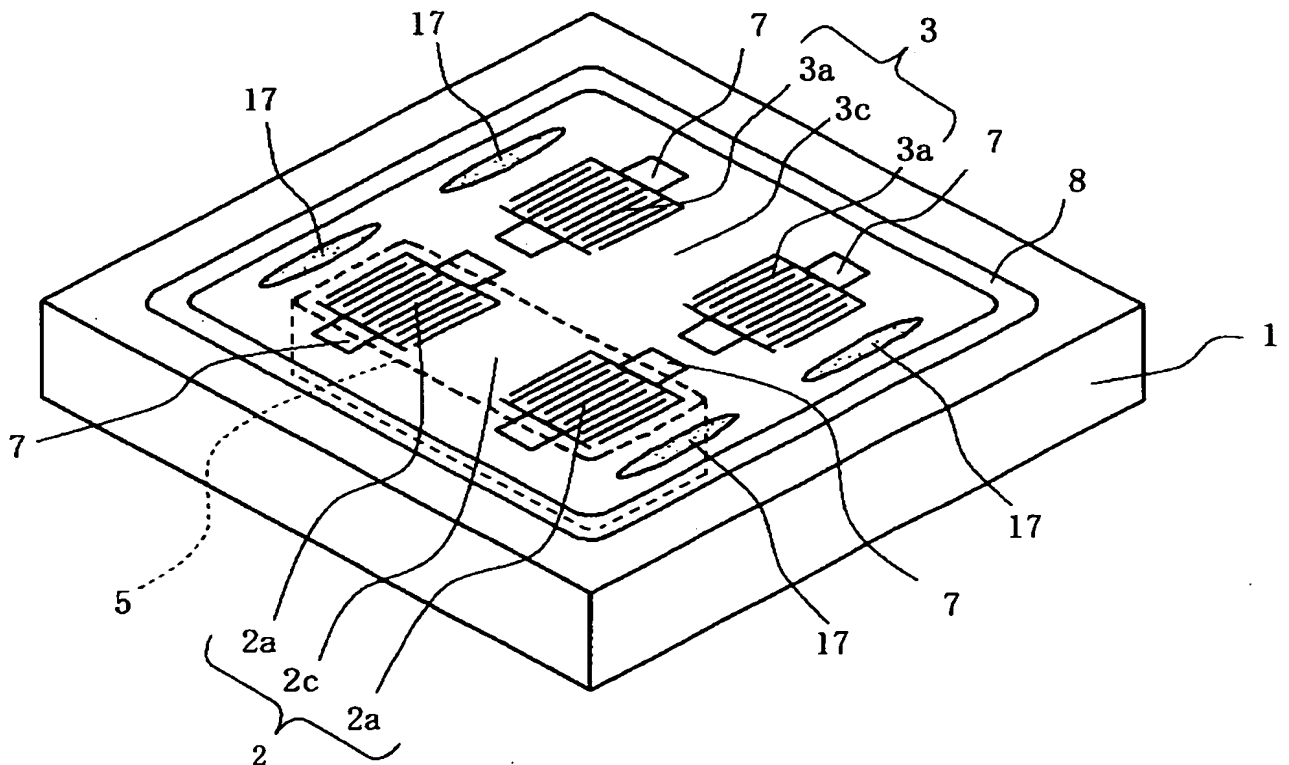

4/22

FIG. 7


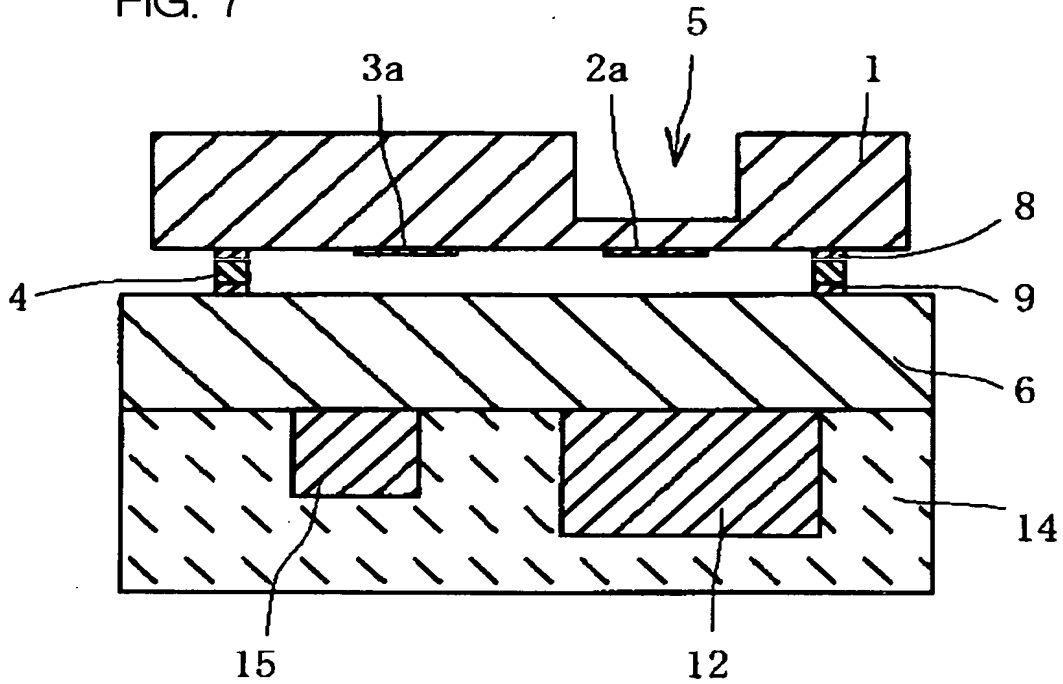


FIG. 8

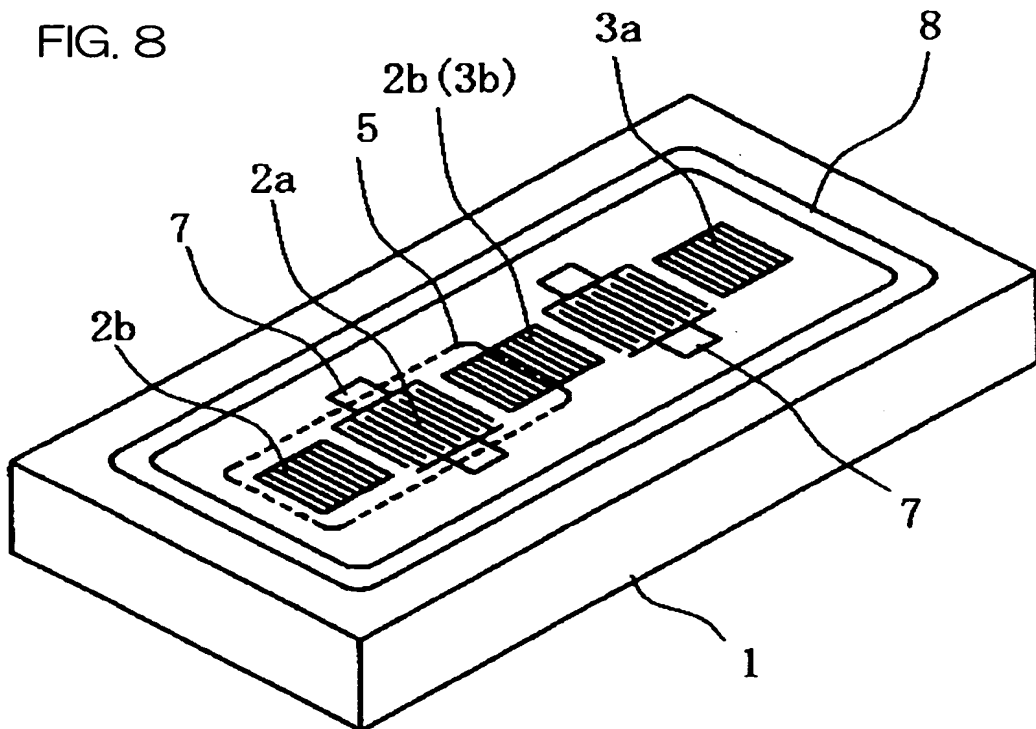

5/22

FIG. 9


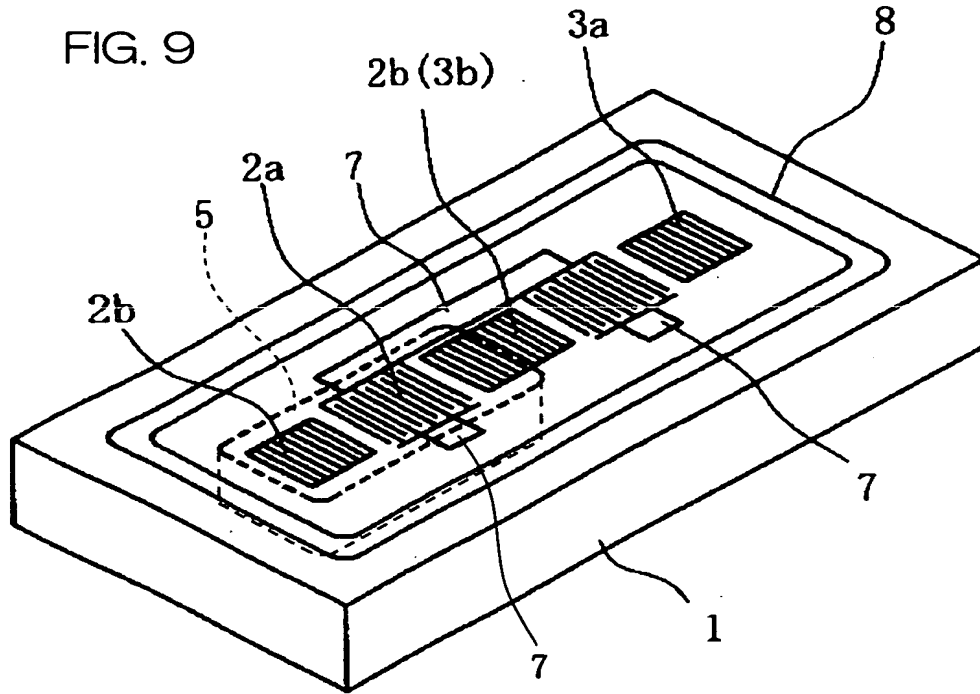


FIG. 10

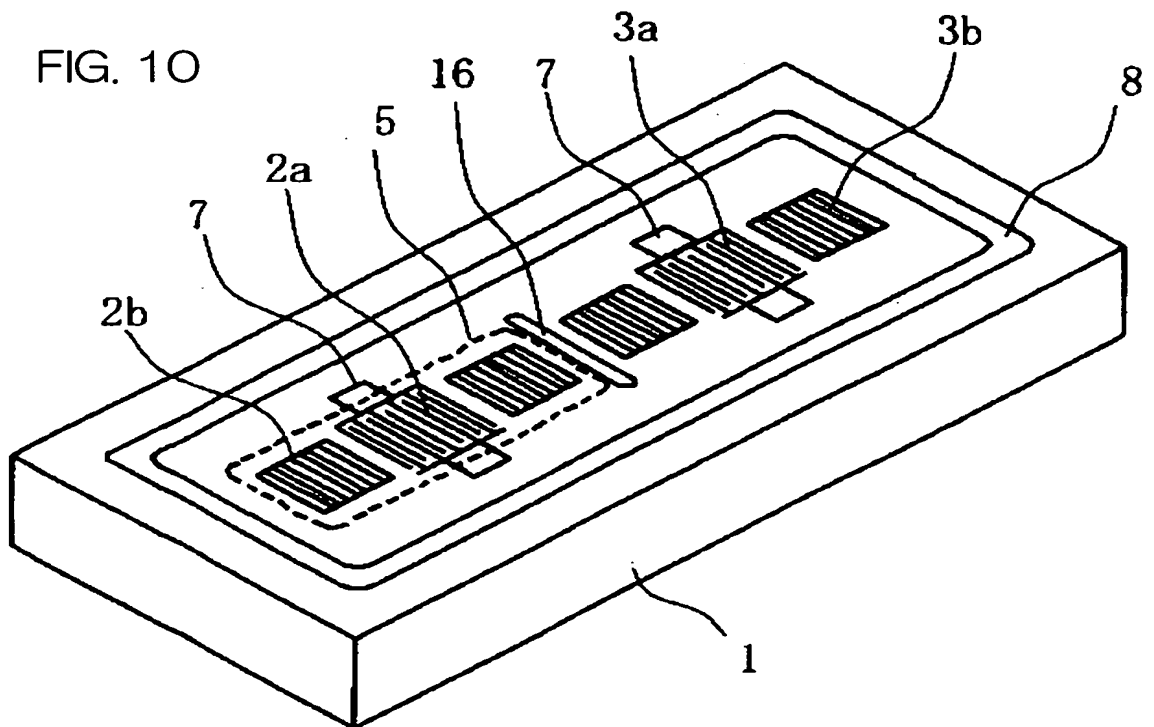

6/22

FIG. 11 (a)


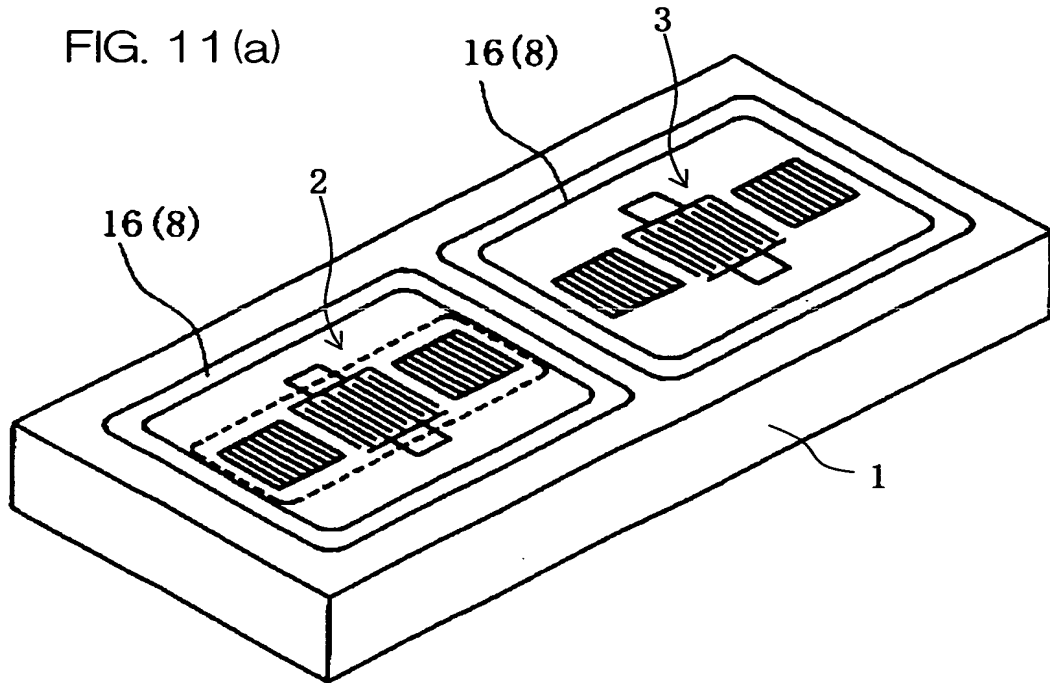


FIG. 11 (b)

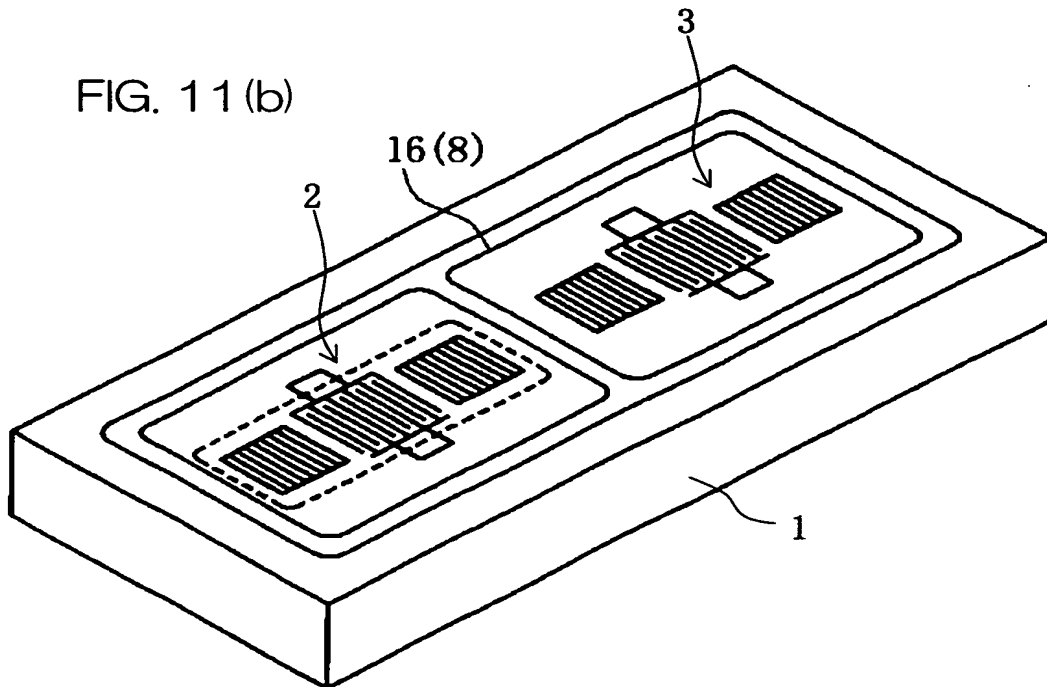

7/22

FIG. 12


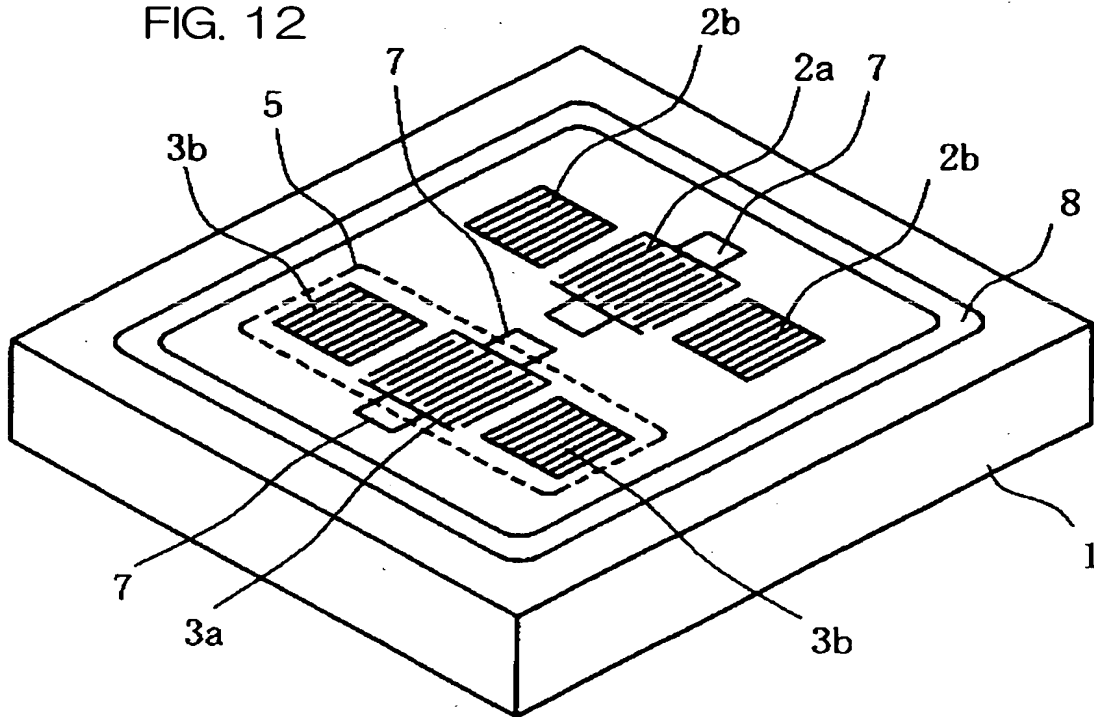


FIG. 13

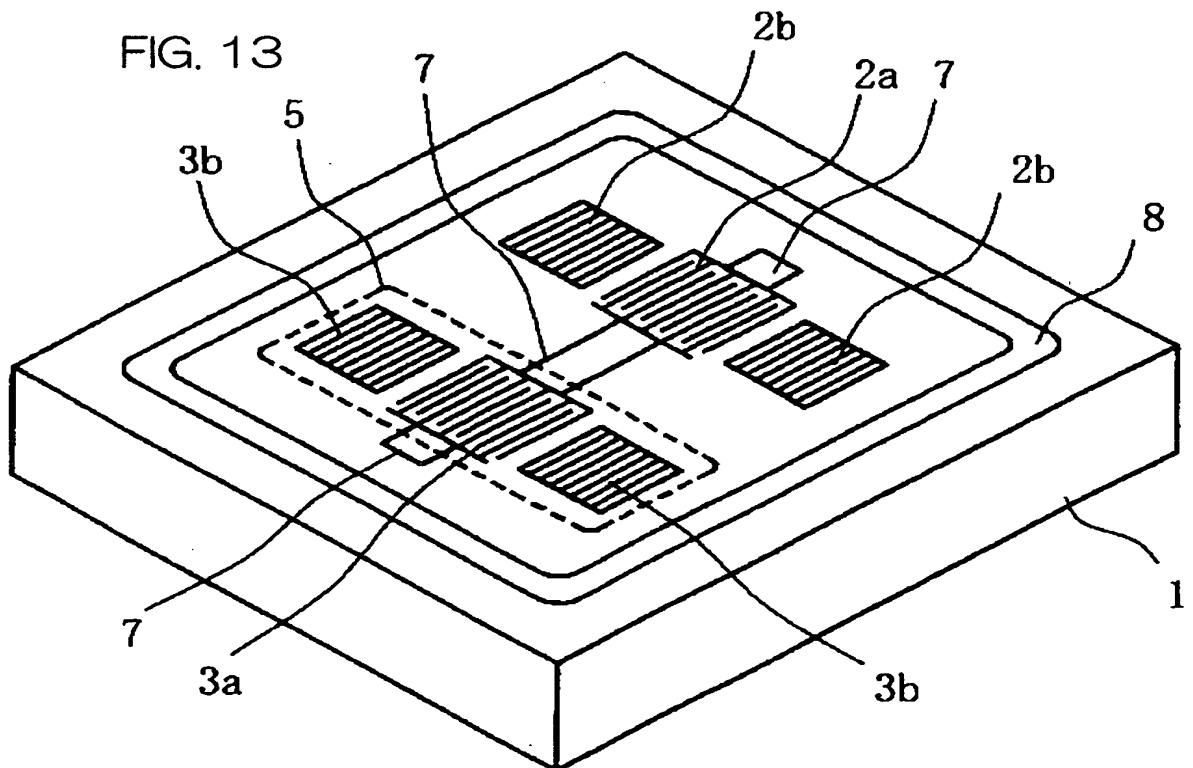

8/22

FIG. 14 RESONANCE CHARACTERISTICS

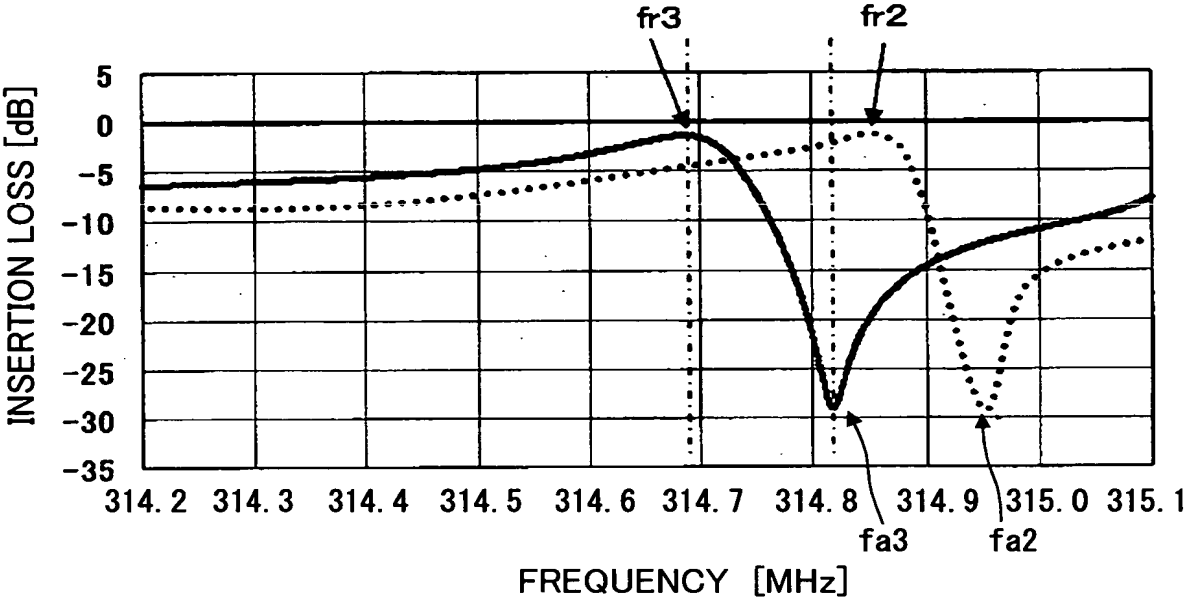


FIG. 15 FREQUENCY TEMPERATURE CHARACTERISTICS

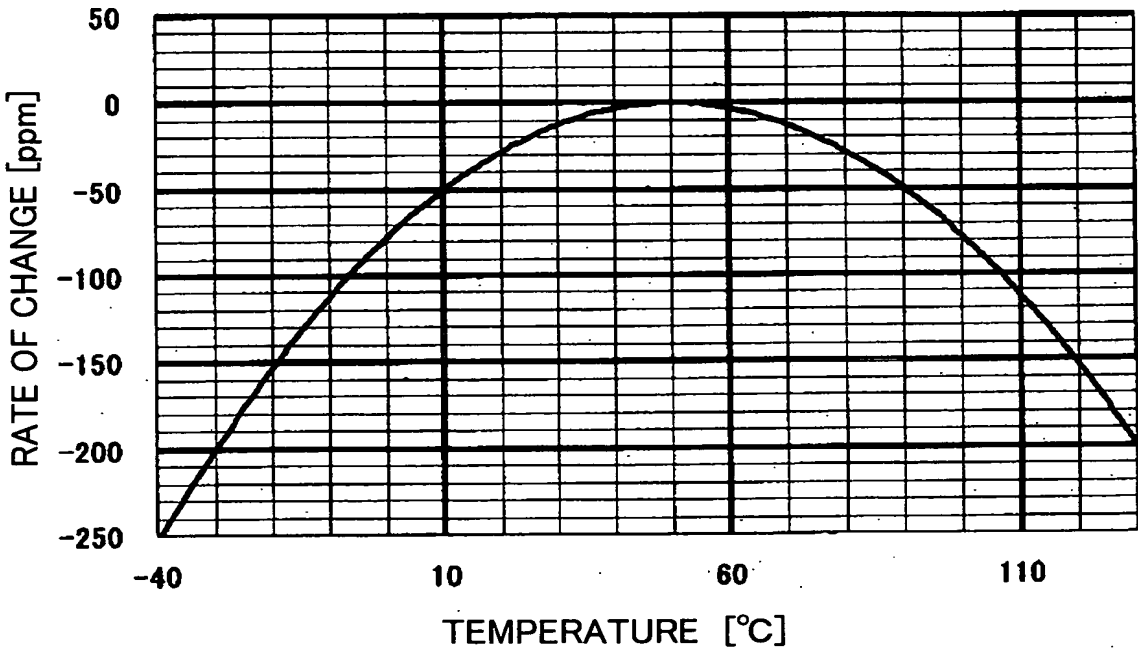




FIG. 16(a)

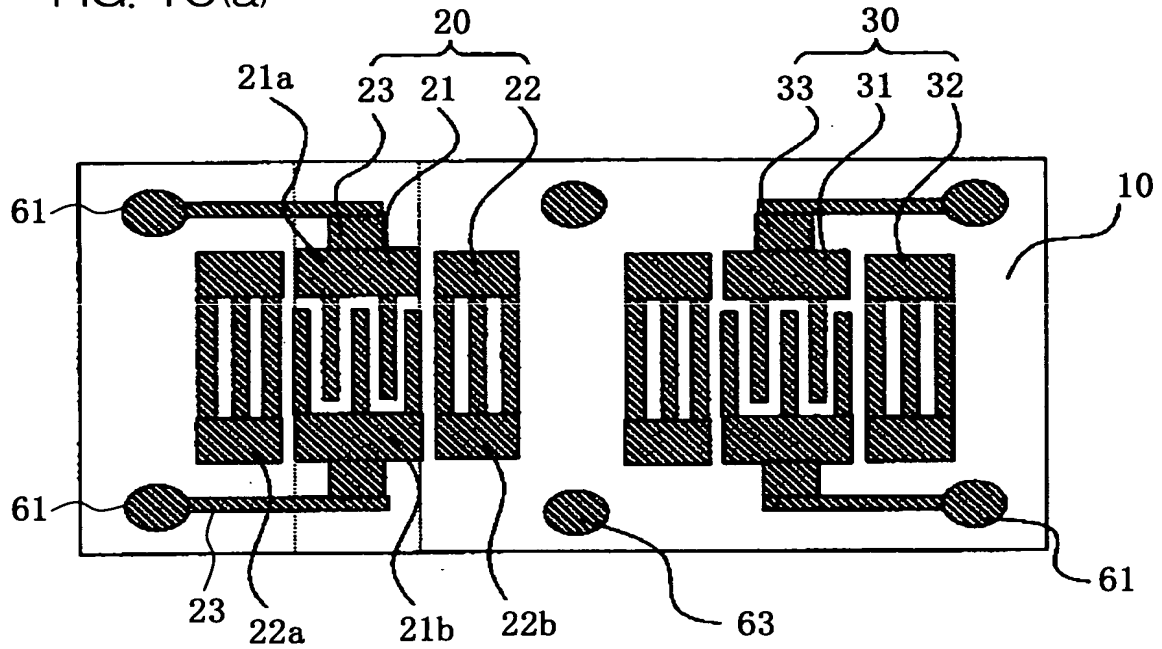


FIG. 16(b)






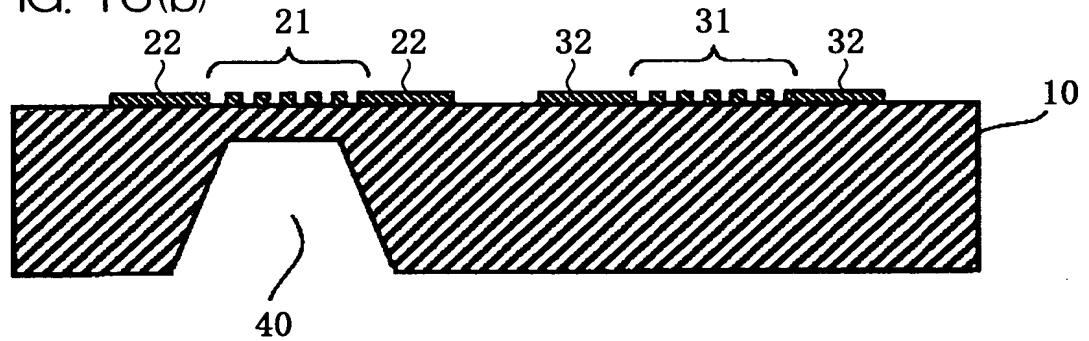


FIG. 16(c)

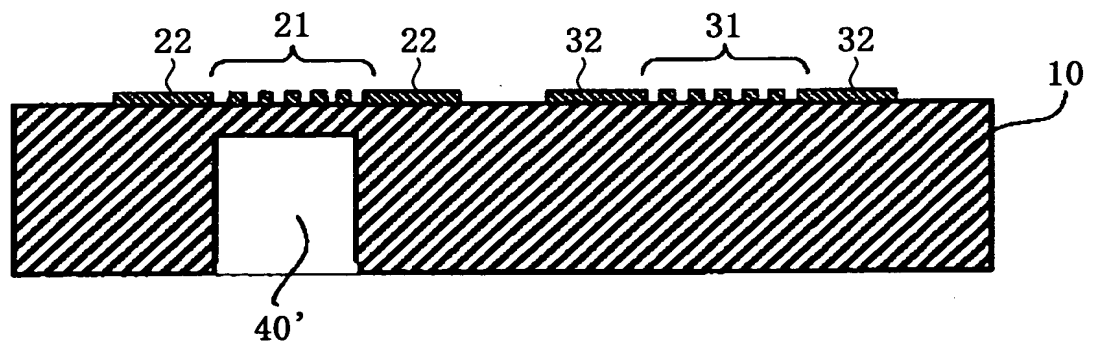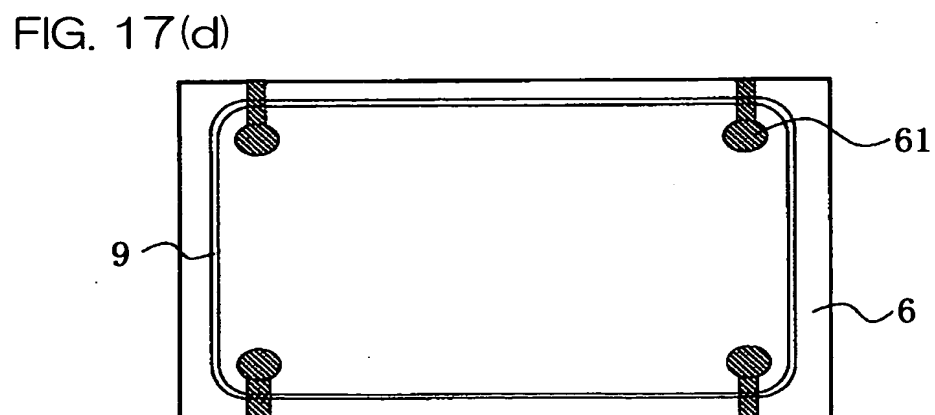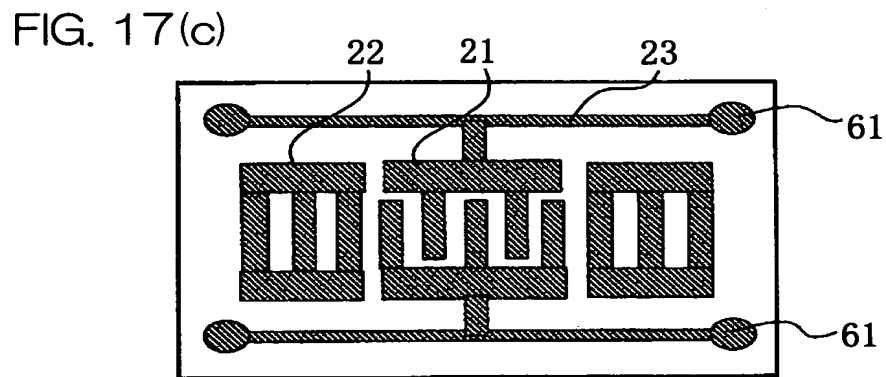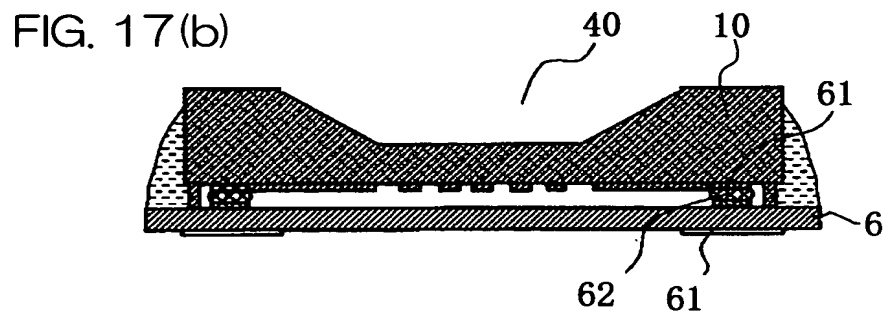

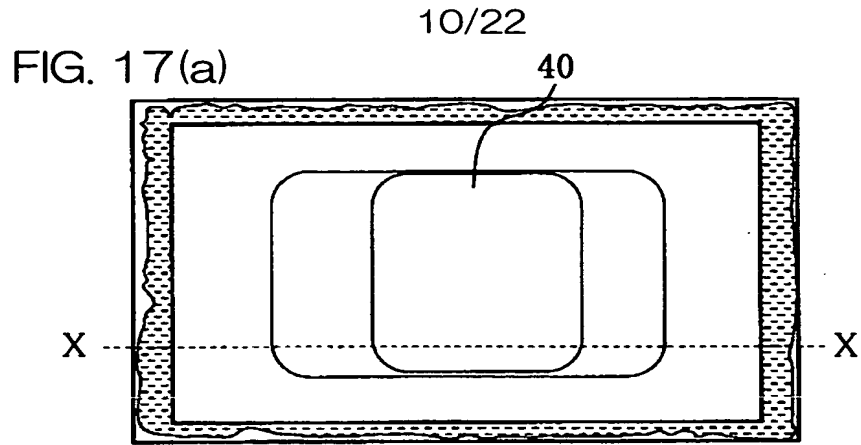

11/22

FIG. 18


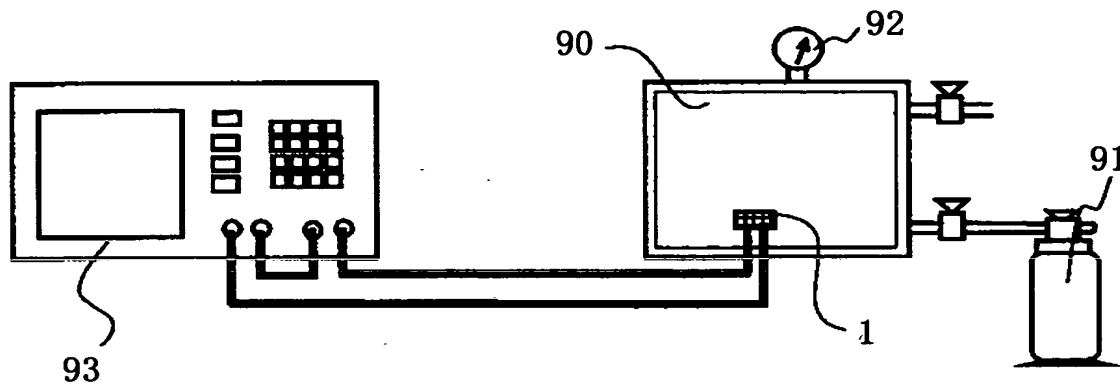


FIG. 19

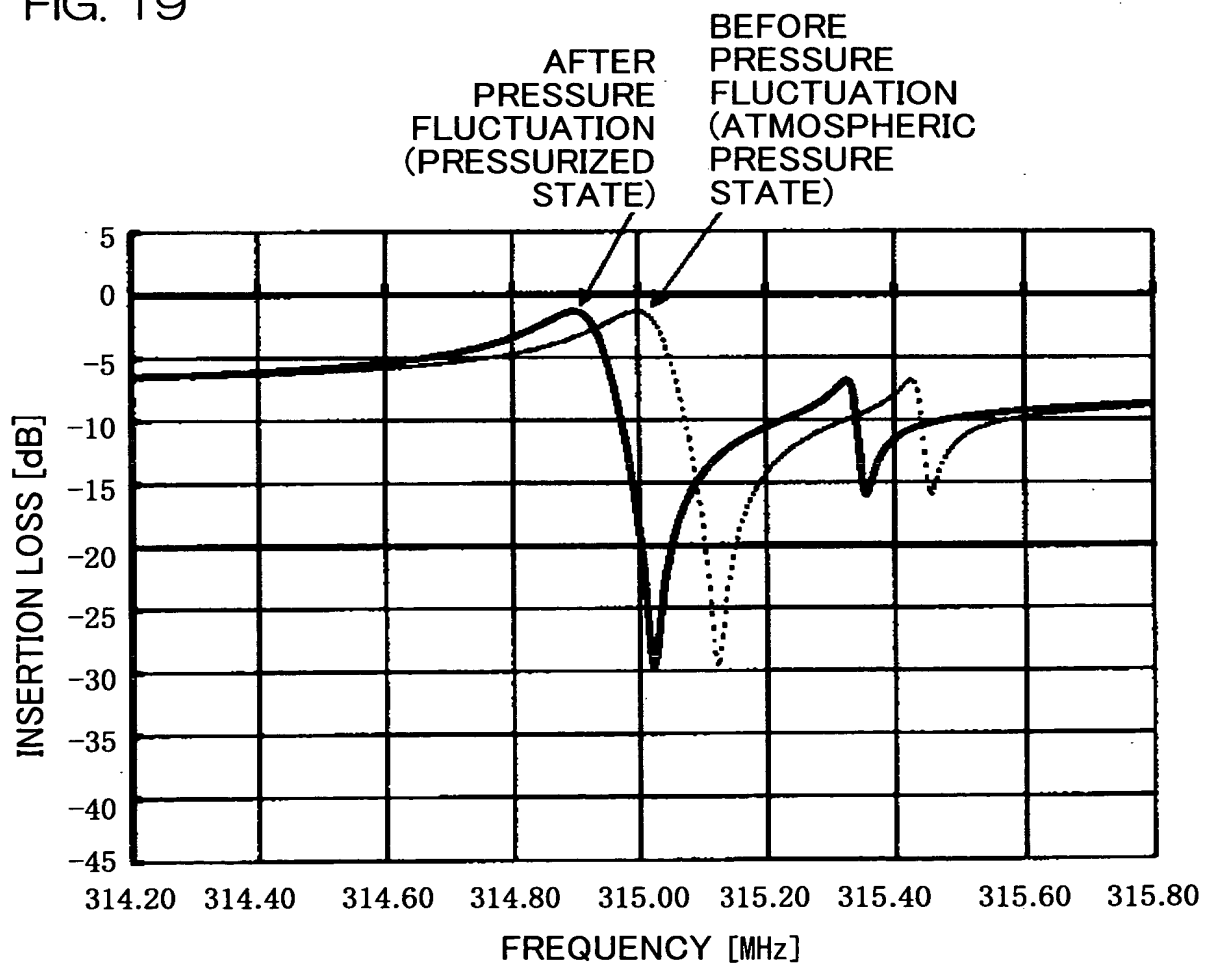

12/22

FIG. 20

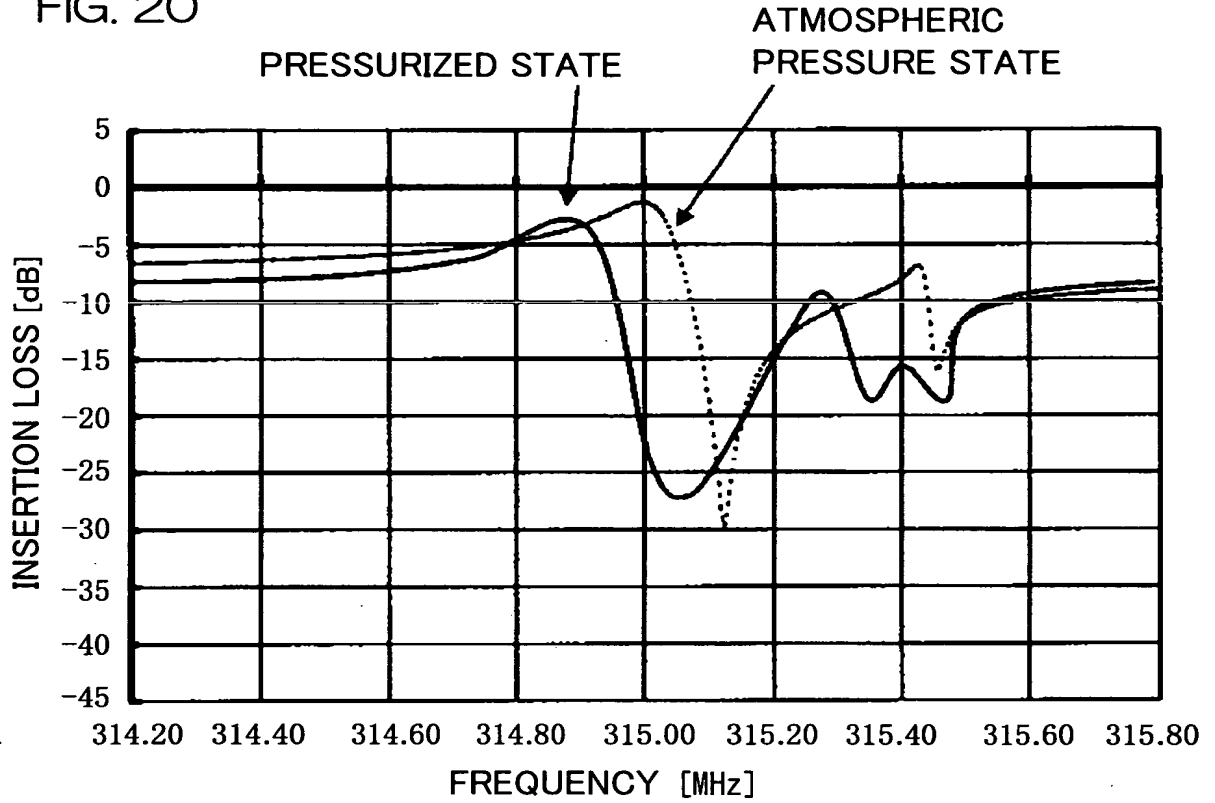


FIG. 21

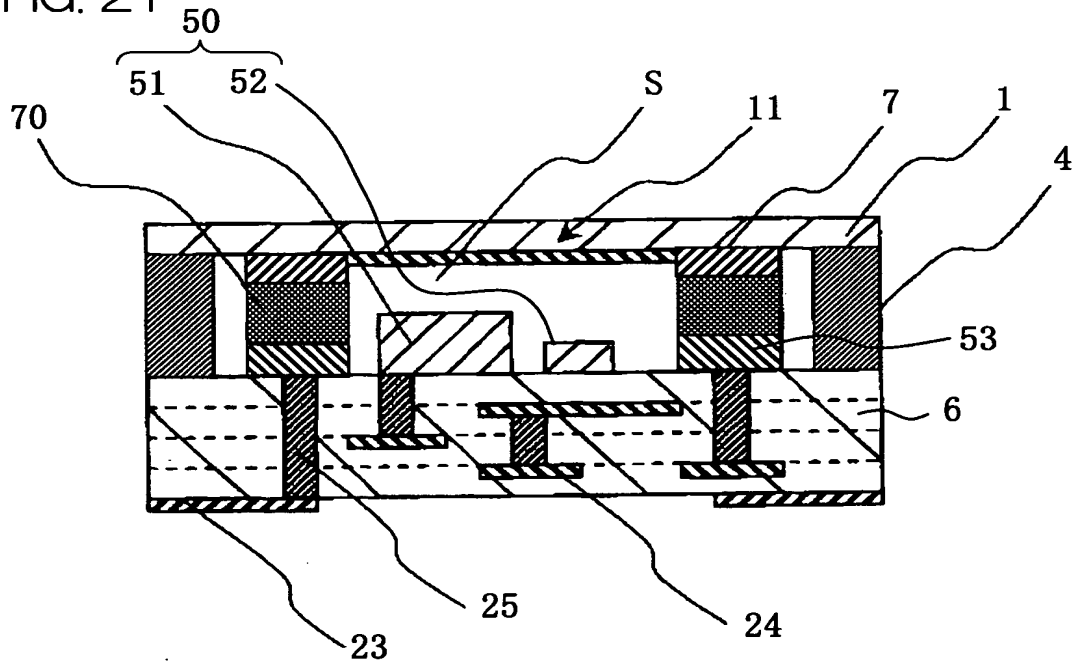


FIG. 22

13/22


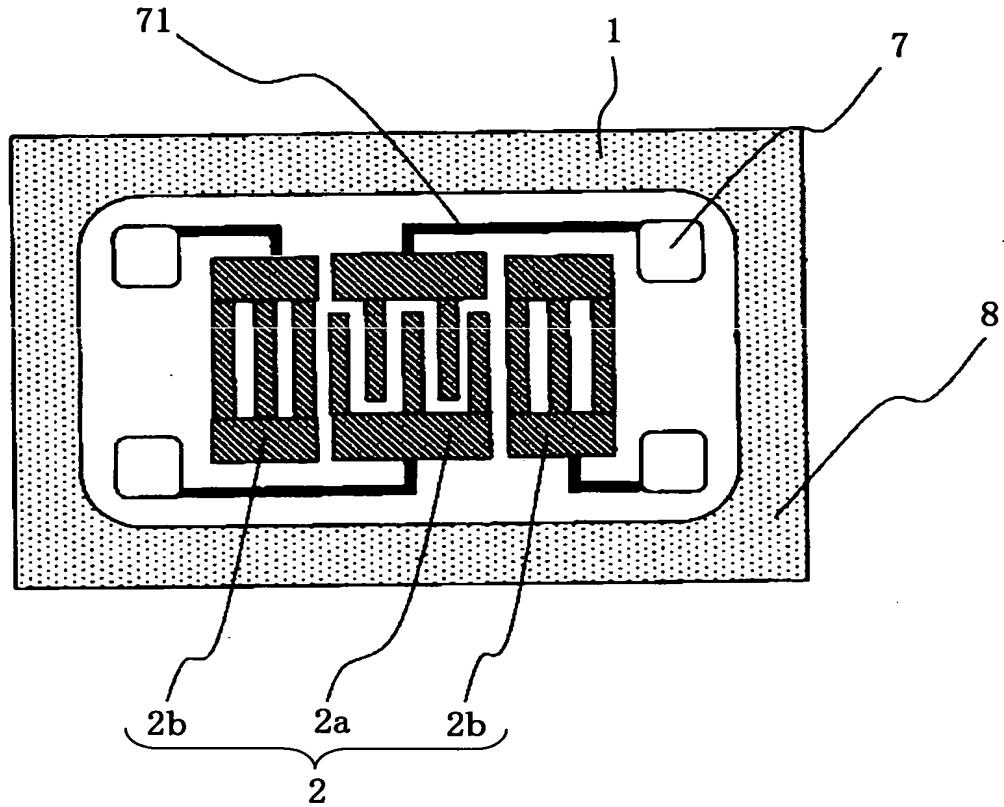


FIG. 23

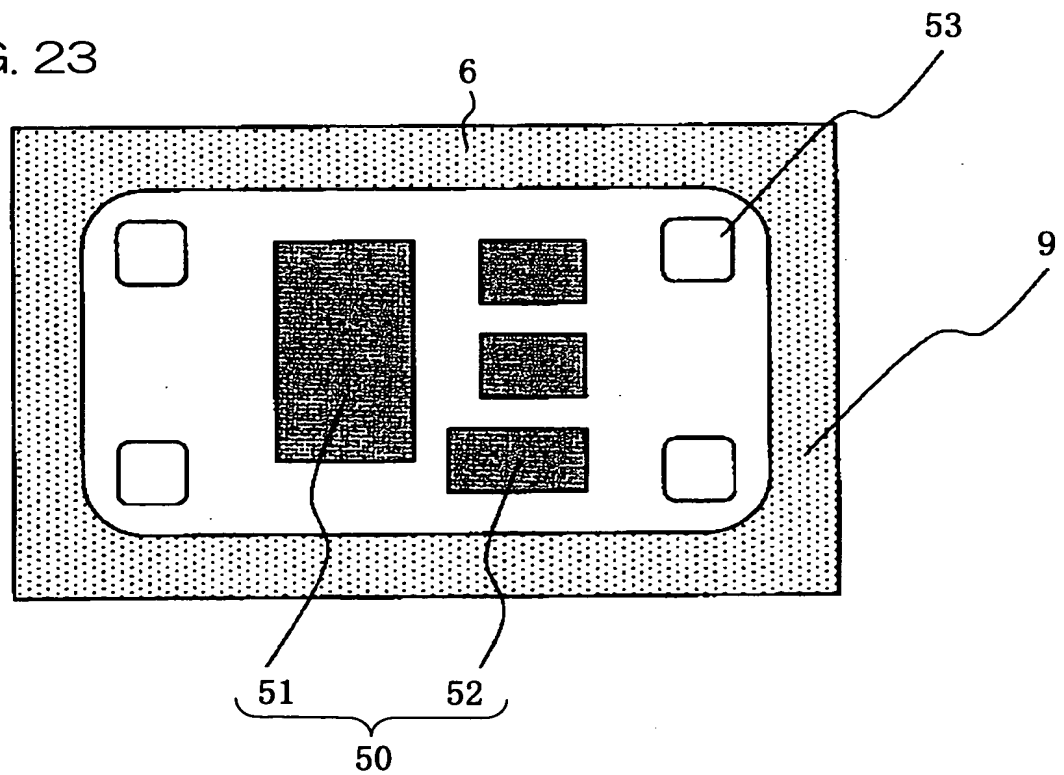

14/22

FIG. 24

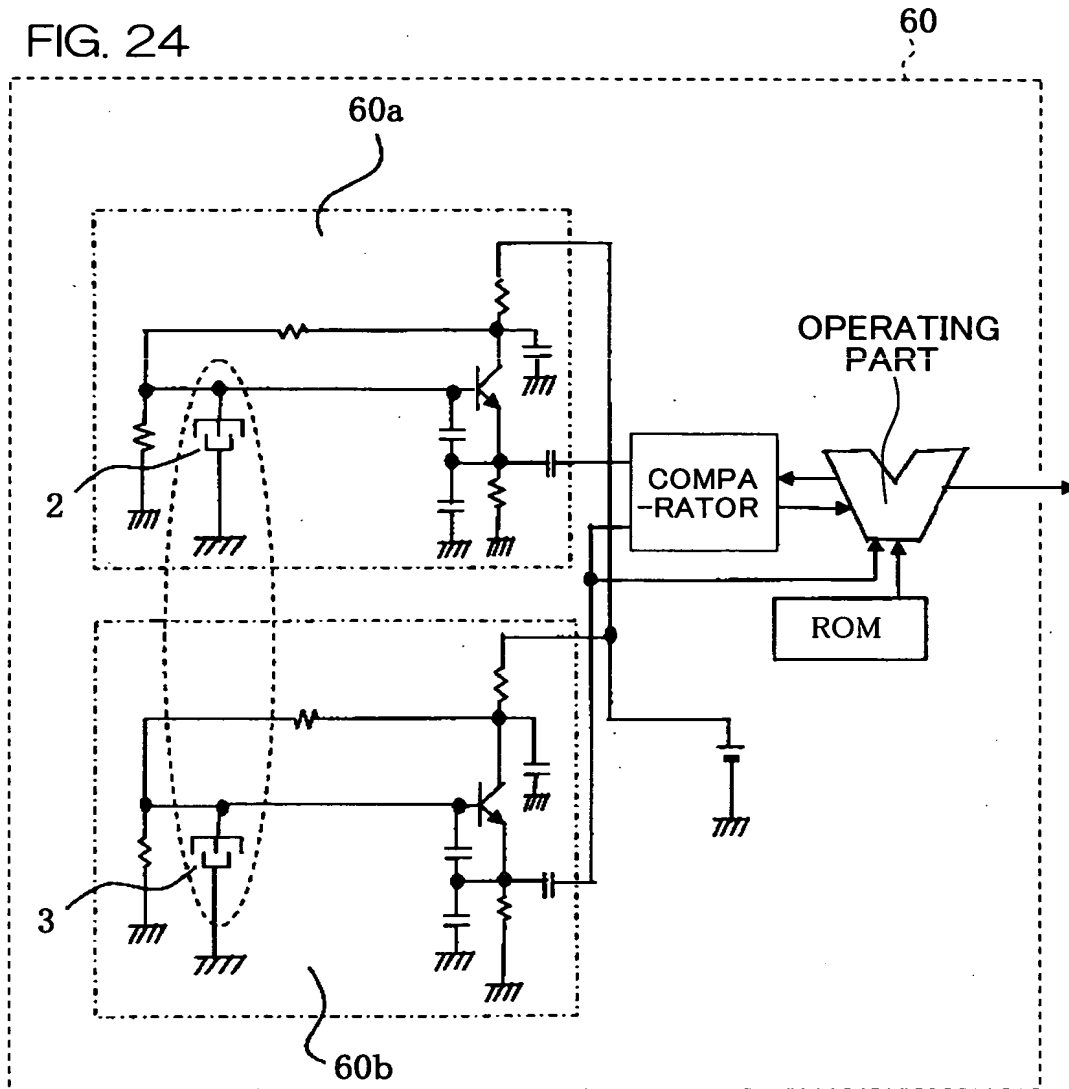


FIG. 25

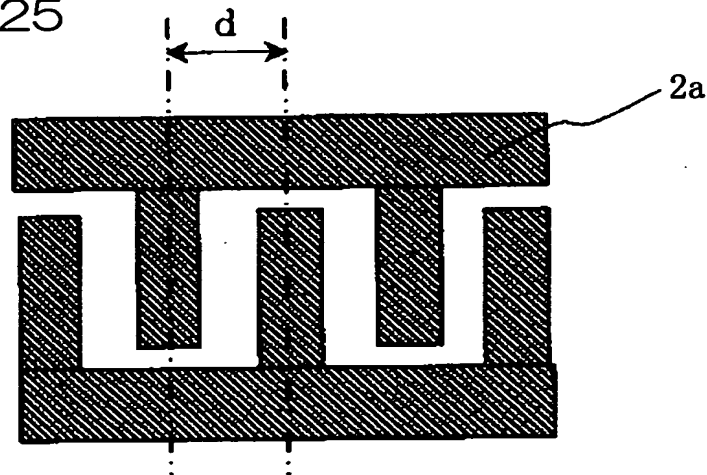


FIG. 27 is a plan view of a rectangular device 1. The device has a dotted background. Inside, there are two symmetrical internal structures 2. Each structure 2 consists of a central hatched rectangular core 2a and a surrounding white frame 2c. The structures are connected to a central horizontal line. Labels 7, 8, 17, and 71 point to various components.

16/22

FIG. 28



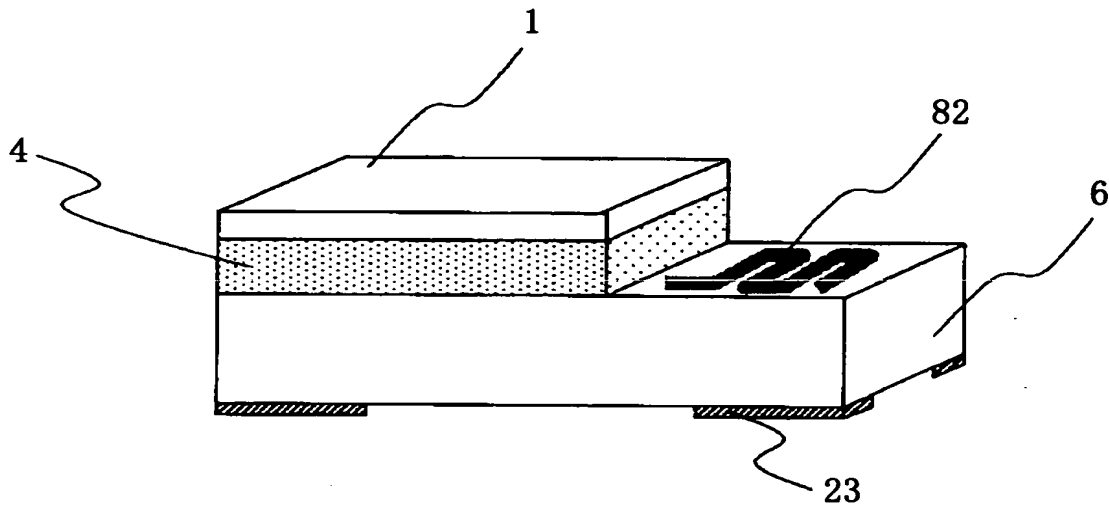


FIG. 29



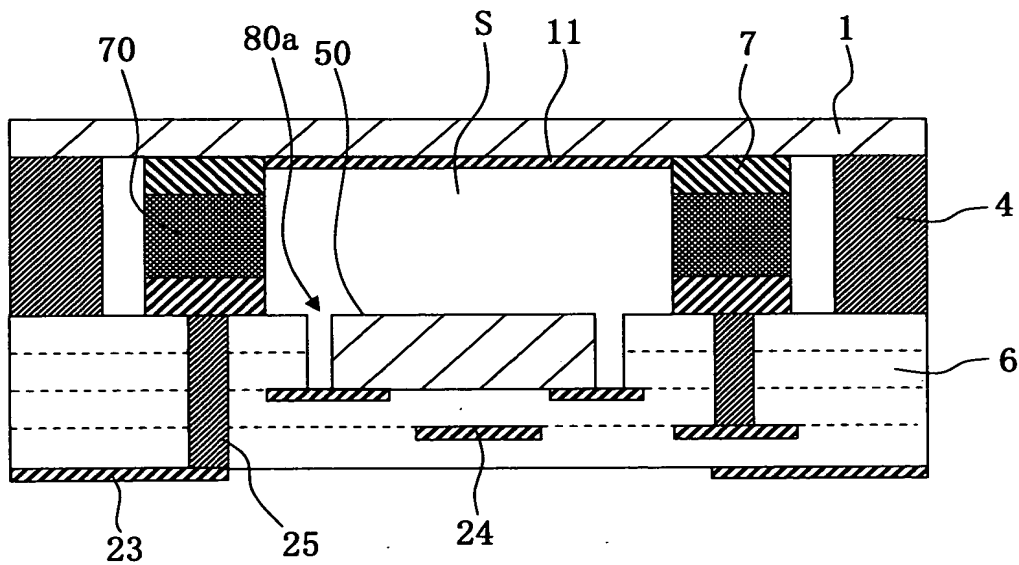

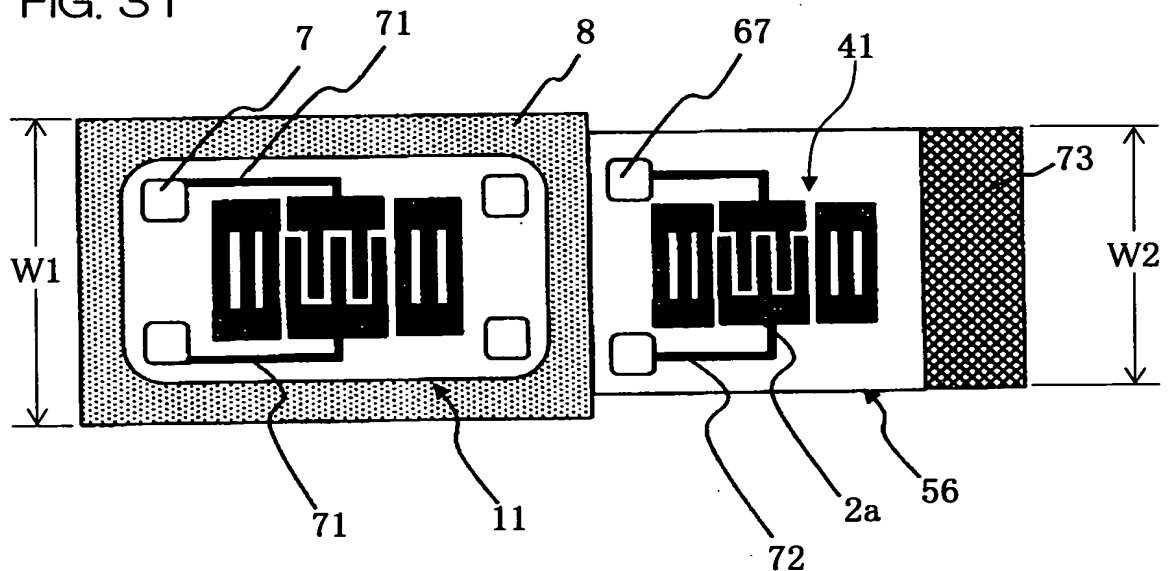

18/22

FIG. 32


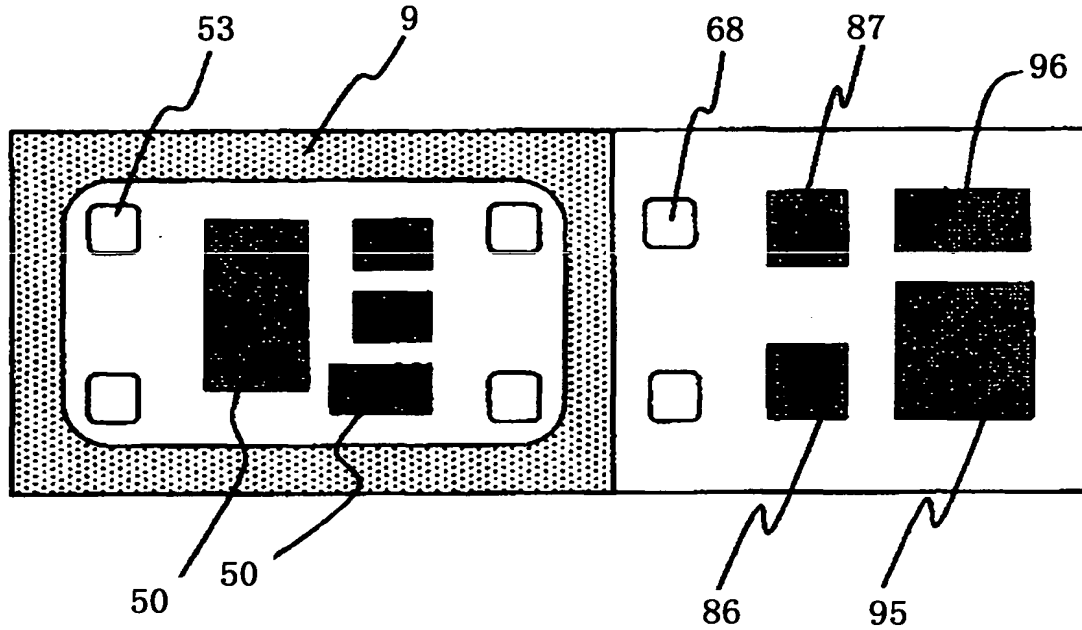


FIG. 33

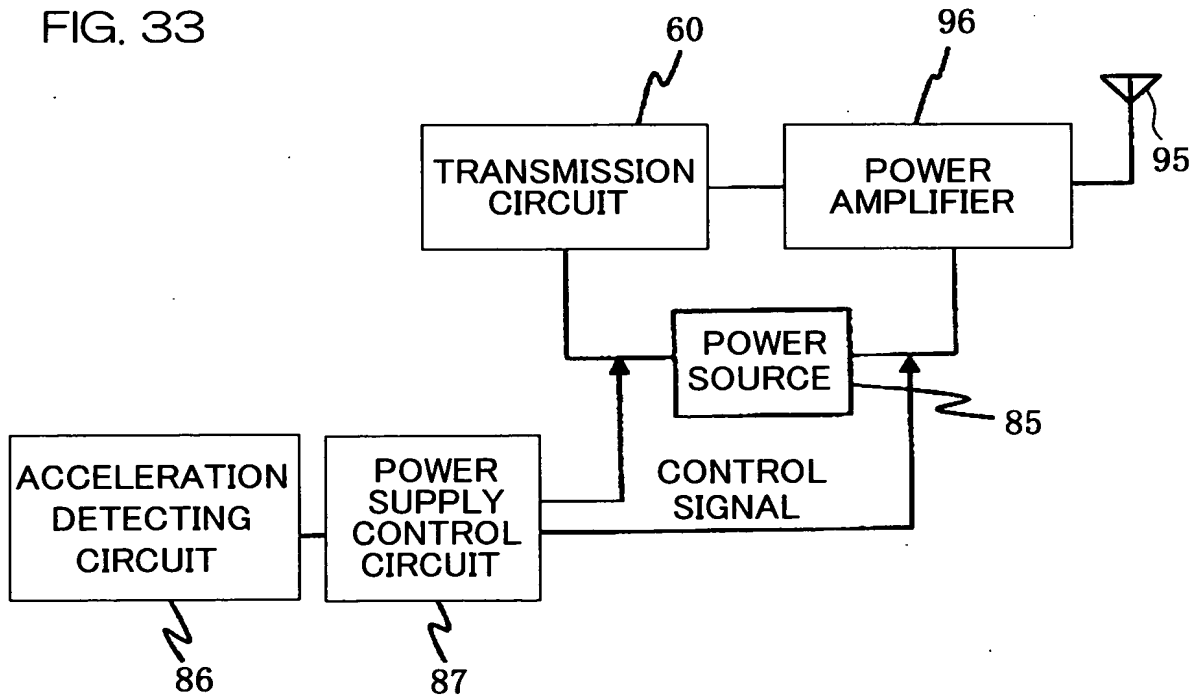

19/22

FIG. 34

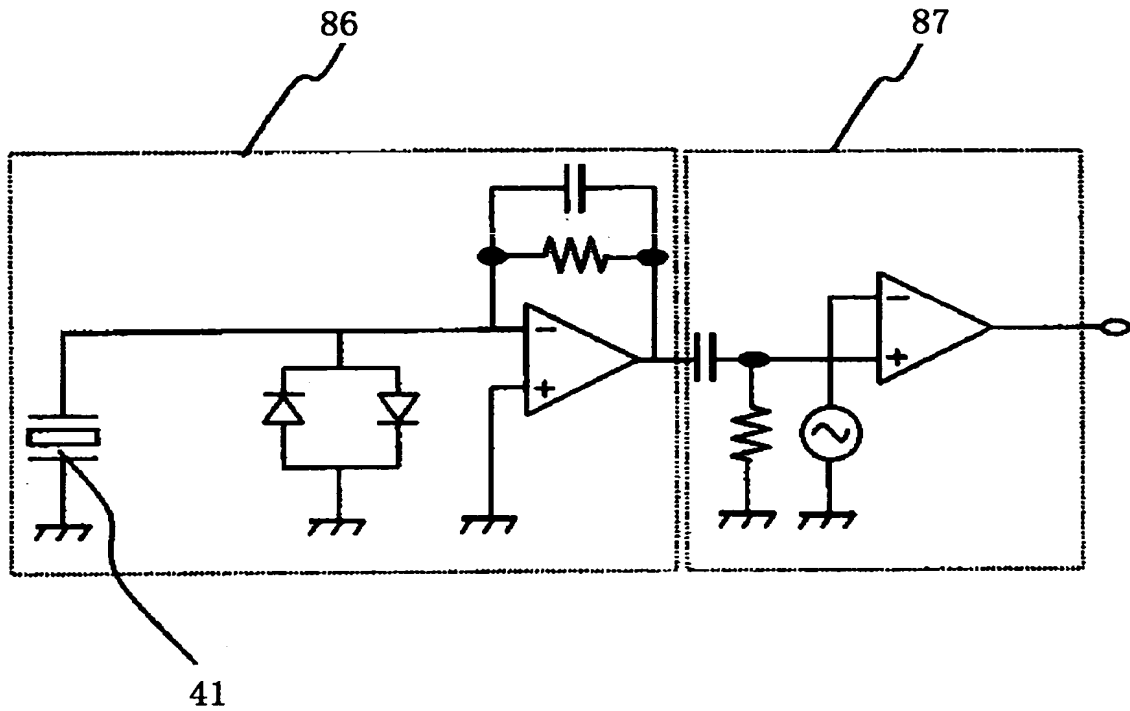


FIG. 35

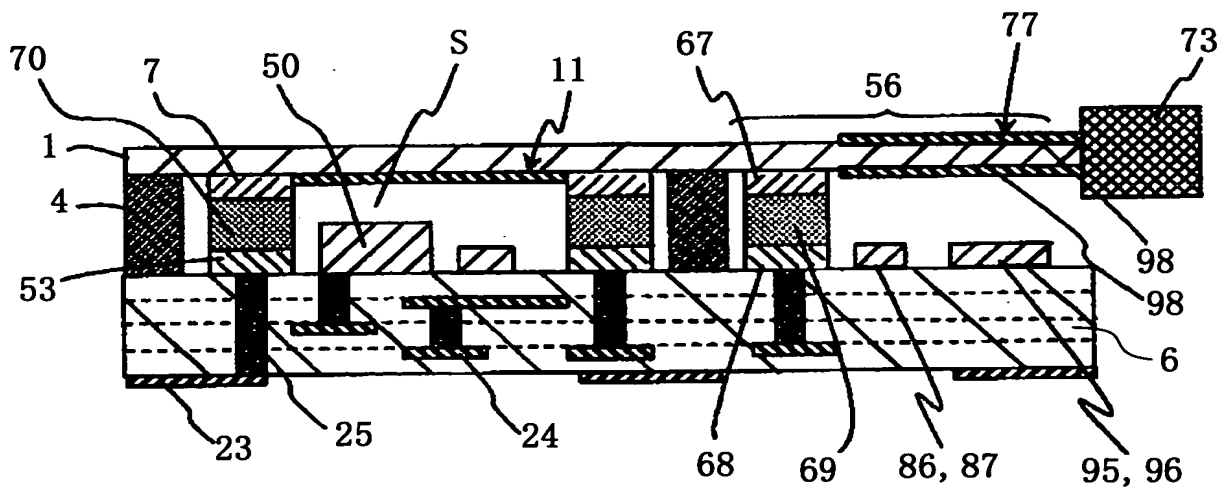


FIG. 36


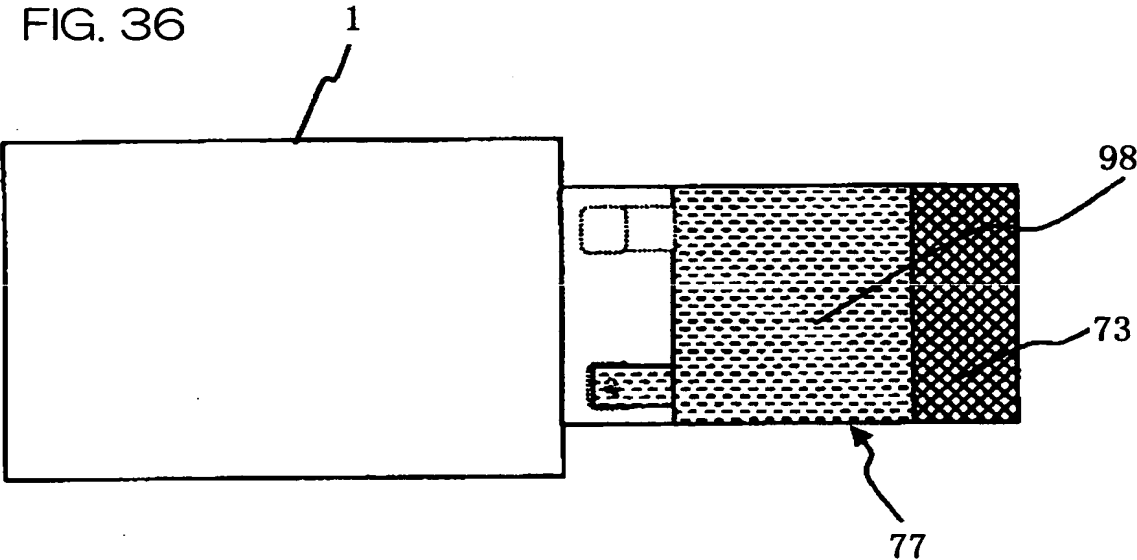


FIG. 37



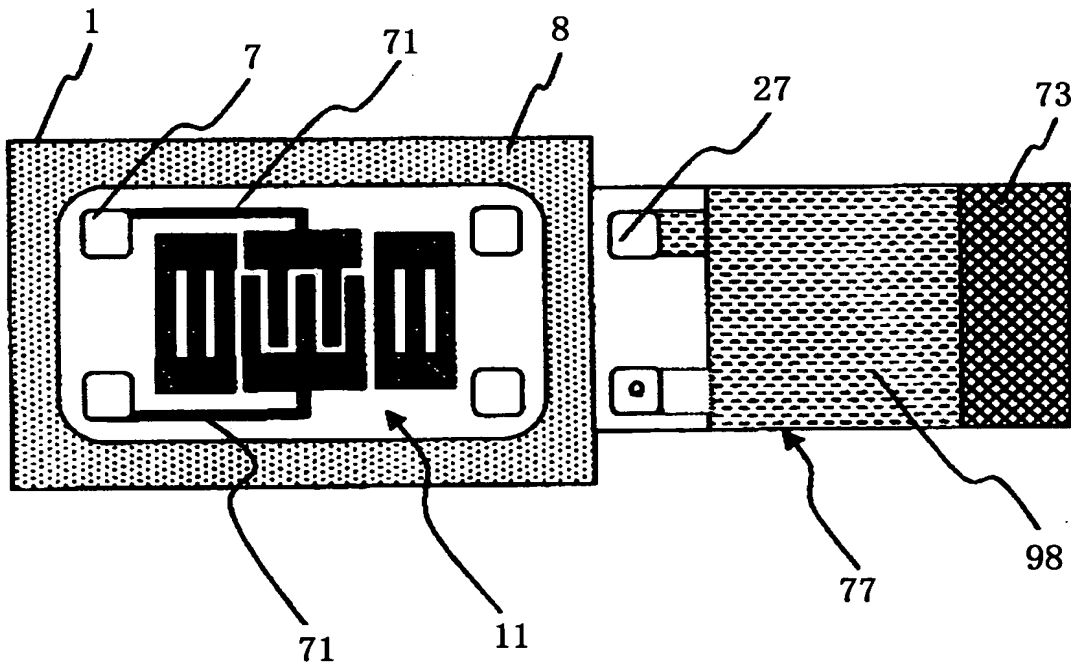

22/22

FIG.40

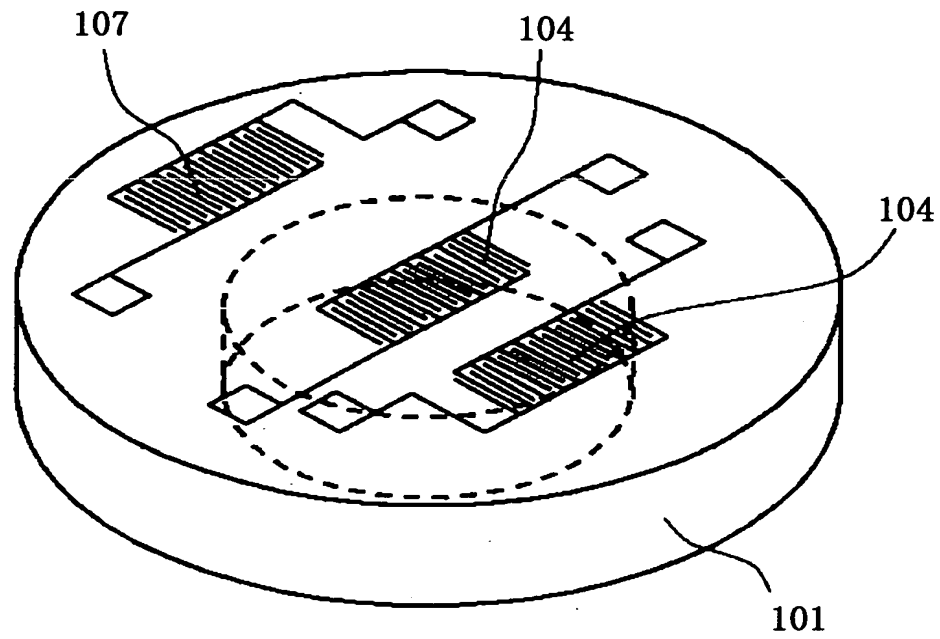


FIG.41

